

# High Power Broadband Free-Space Isolator

kW, 450nm to 2400nm, >100nm broadband



DATASHEET

BUY NOW



## Features

- Broadband
- Large Aperture
- Low Loss
- High Reliability
- KW Optical Power Handling
- Polarization Dependent Input

## Applications

- Laser System
- Lab Use
- Instruments

The OIHF is designed for kilowatt-class laser systems with a single polarization. With Agiltron's proprietary configuration, these isolators feature unique compensation technologies for thermal lensing and wavelength shifts under intense optical radiations as well as efficient internal cooling apparatus. Moreover, It has broadband operations: over 100nm with isolation > 40dB and over 300nm > 30dB. The optical isolators cover a wide wavelength range of 450nm to 2450nm. The standard wavelength is centered at 1550nm. A built-in output tap monitor is an option. Agiltron has a volume isolator production operation for making custom-specific designs with specially-designed testing tools.

## Specifications

Parameter	Min	Typical	Max	Unit
Center Wavelength	450		2400	nm
Wavelength Range ( $\pm$ center)	100	150	270	nm
Insertion Loss <sup>[1]</sup>	0.3	0.5	0.7	dB
Return Loss	50			dB
Isolation	30	40	45	dB
Forward Optical Power (CW) <sup>[2]</sup>			1	kW
Backward Optical Power(CW) <sup>[3]</sup>			100	mW
Aperture		10		cm
Operating Temperature	-5		60	°C
Storage Temperature	-40		85	°C
Mounting Adaptor	Available			

### Notes:

- [1]. For 1550nm, other wavelengths may have a higher loss.
- [2]. CW
- [3]. CW

**Note:** For a polarized input light version, the isolation is optimized to block the light reflection of the same polarization. Although lights of other polarizations may also be blocked, the extinction may be poor. PM isolators can be specially made to block backward propagating lights of all polarizations. PM isolators can also be made with a light polarizing function.

**Note:** The specifications provided are for general applications with a cost-effective approach. If you need to narrow or expand the tolerance, coverage, limit, or qualifications, please [click this link](#):

**Legal notices:** All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 01/17/25

© Photonwares Corporation

P +1 781-935-1200

E [sales@photonwares.com](mailto:sales@photonwares.com)

W [www.agiltron.com](http://www.agiltron.com)

Information contained herein is deemed to be reliable and accurate as of the issue date. Photonwares reserves the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Photonwares Corporation in the U.S. and other countries.


# High Power Broadband Free-Space Isolator

kW, 450nm to 2400nm, >100nm broadband



## DATASHEET

### Mechanical Dimensions (mm)

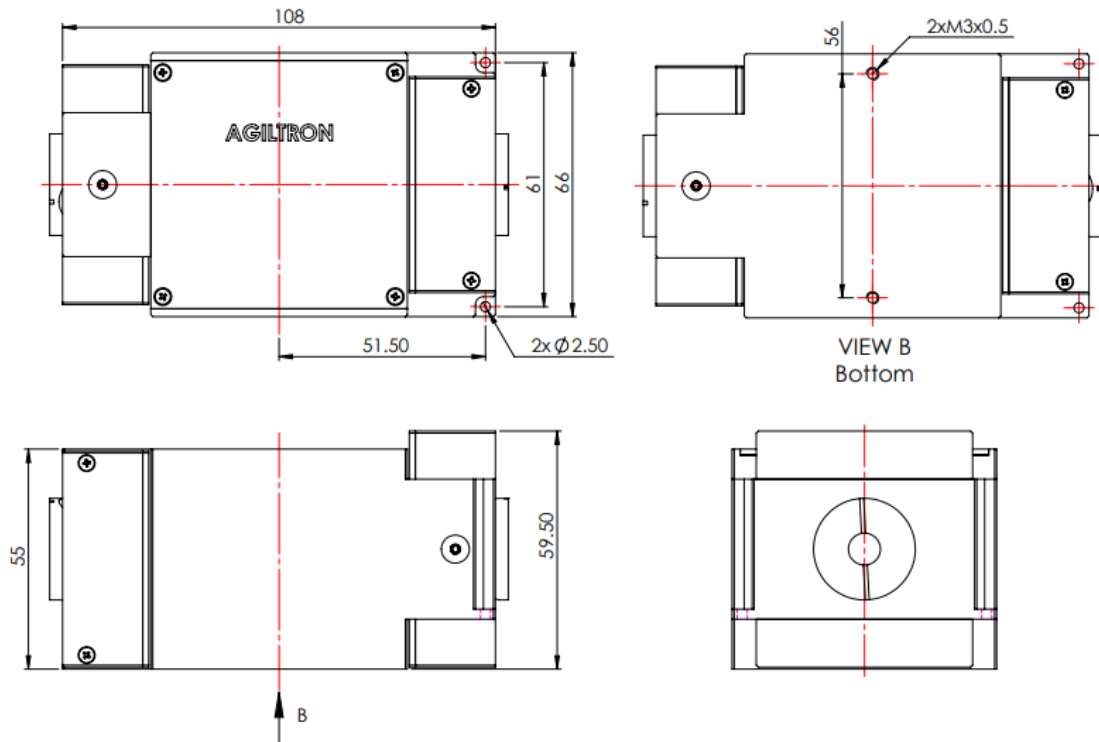

### Optical Performance (typical single stage)

### Ordering Information

Prefix	Type	Wavelength	Aperture	Package	Forward Power	Backward Power	Compensator		
OIHF-		1060nm = 1 1310nm = 3 1550nm = 5 2000nm = 2 980nm = 9 850nm = 8 780nm = 7 650nm = 6 450nm = 4	1cm <sup>[1]</sup> = 4 3cm = 3 10cm = 1 Special = 0	Regular = 1 With tap = 2 With oil cool = 3 Special = 0	1kW = 1 5kW = 2 Special = 0	5W = 1 10W = 2 50W = 3 Special = 0			Yes = 1 Non = 2

RED color for special order

[1]. For wavelength >1310nm, only 1 cm aperture is available.